Traditional Block Quilt 45" x 68"



Fabric Requirements

16" Traditional Blocks1¾ Yards BackgroundBinding

Back

Cutting Instructions

Background Fabric

- Cut (2) 24" x 24" squares Sub cut diagonally twice for a total of (8) quarter square triangles [Diagram 1]. You will only use 6.
- Cut (2) 16½" x 16½" squares [Diagram 1].
- Cut (2) 12½" x 12½" squares Sub cut diagonally once for a total of (4) half square triangles [Diagram 1].

Assembly

Sew triangles and blocks together in rows attaching corner pieces as shown [Diagram 2].

Sew rows together [Diagram 3].

Quilt - See quilting suggestions.

Bind - Cut 241" of binding $1\frac{1}{4}$ " or $2\frac{1}{2}$ " wide (6½ strips width of fabric or cut on bias).

Note: The triangles measure larger than needed. The outside edge can be trimmed down after the quilt is assembled. Since the blocks are printed the measurement may be slightly larger or smaller than 16". Adjust the offsetting block measurement as needed.

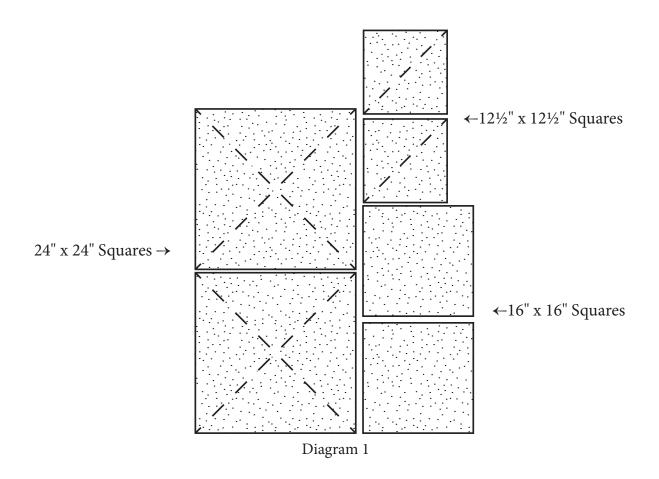




Diagram 2 © Renae Allen - RGA Design LLC - 2019

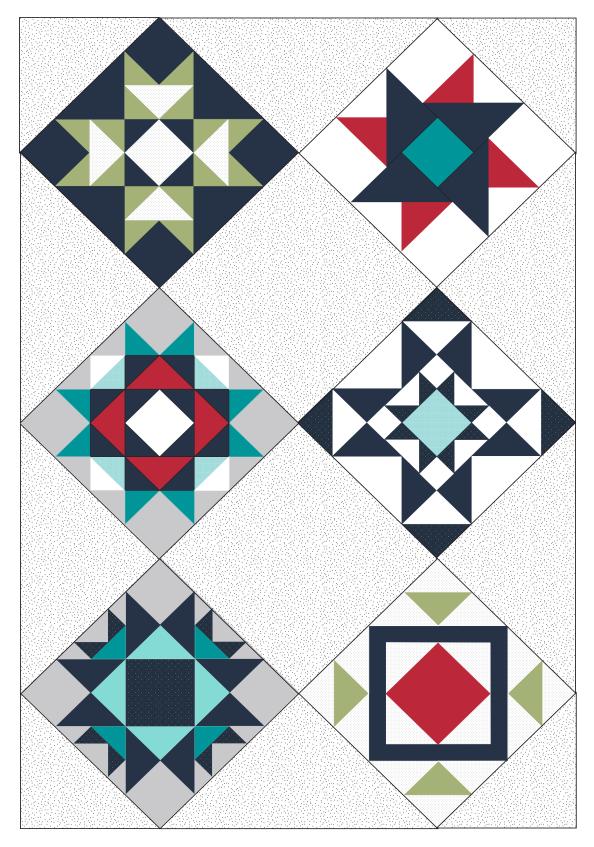


Diagram 3

© Renae Allen - RGA Design LLC - 2019